SPIE BLOCK

cat. no. 108.92

HVAC attachments and grilles

CEILING SWIRL DIFFUSORS A









PRODUCT DESCRIPTION


The outlet elements are used to distribute the air to the room. Most often, swirl diffusers are used, which allow a rapid reduction of the flow rate of the supplied air and its even mixing with the air in the room. Perforated sheet metal is used for free and even air supply to the room.

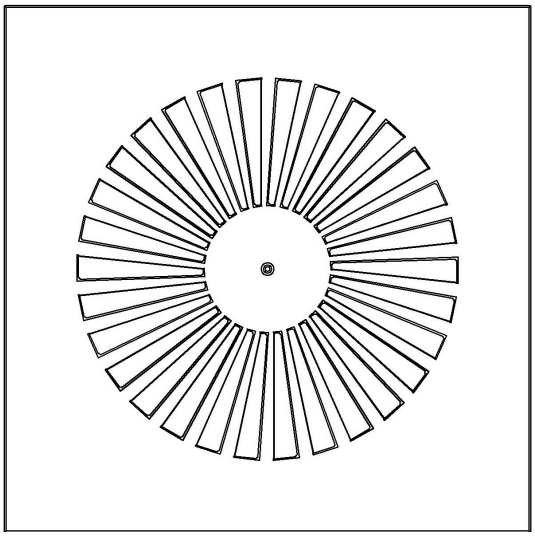

Swirl diffuser BLOCK for filter 457 mm with 30 fixed air control blades

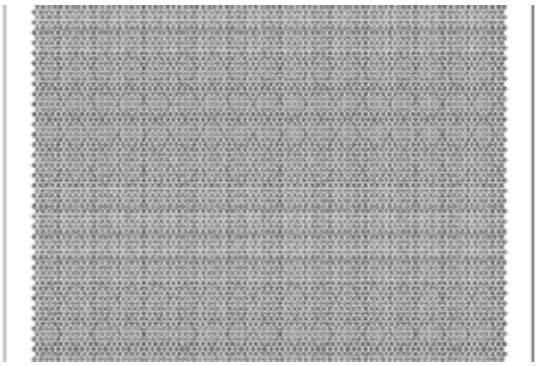

Perforated sheet

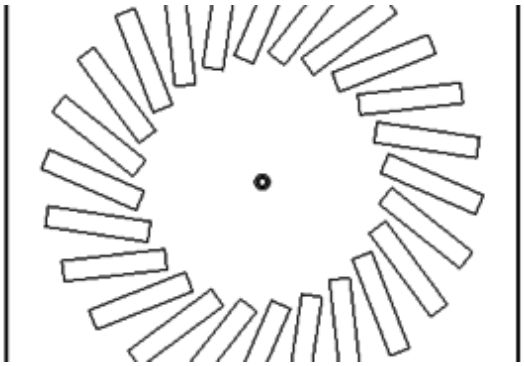


TROX diffuser

CEILING MOUNTING

- The standard attachment of the output element is by means of a central screw, which is anchored to the cross member located in the housing of the attachment.
- The size of the attachment depends on the size of the filter and its bearing surface.

BENEFITS

- color resistance
- corrosion protection

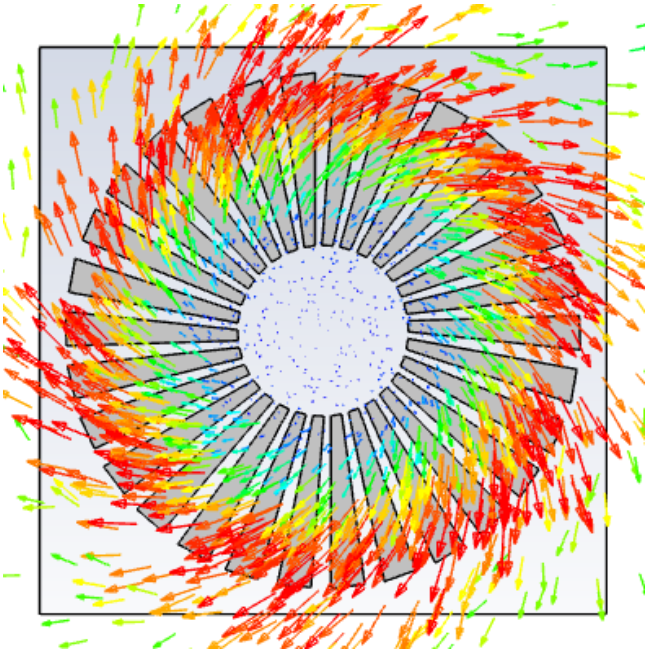

Air flow through the diffusor

SUITABLE FOR AREAS

- Pharmacy, biotechnology, medical devices
- Microelectronics, optics, automotive, electrical engineering
- Healthcare
- Engineering, food, chemical industry, etc. industry

TECHNICAL DATA

Type
Ceiling swirl diffusors

Type of HVAC attachment
extension to a light metal ceiling with a grid of 625 mm
extension to the panel ceiling

The size of the filter in the attachment
attachment without filter
filter 305×305 mm
filter 475×475 mm
filter 570×570 mm

Exhaust element
swirling diffuser with fixed slats
swirling diffuser with manually adjustable slats
ceeling diffuser
perforated metal sheet
Swirling vent-grille BLOCK
Swirling vent-grille BLOCK

Surface of the diffusors
Komaxit powder coating in RAL 9016
Stainless steel AISI304
Komaxit powder coating in RAL shade

Atypical design
Type design
Atypical design
Type design 0 - Unique specification out of offered versions Atypical design Q - atypical design that cannot be uniquely specified by a code

MORE INFORMATION, PHOTOS