

Door

REVOLVING DOOR-I



Together with the casing, this metal revolving door represents one of the basic elements to construct clean workplaces and areas with maximum safety, sterility, hygiene, easy maintenance and sanitation.

PRODUCT DESCRIPTION

Facing


- The facing of the door leaf consists of a molded tile produced by precision molding.
- Reinforcements are glued-in along the perimeter of the facing, in order to increase the rigidity of the door leaf.
- Reinforcement and filler are glued together under pressure.

Door wing

- The door leaf is solid or glazed with the PHARMA system, offering double-sided glazing where the glass pane is in plane with the surface of the door leaf.
- It is possible to install blinds in the space between the glass panels.

Casing

- Mounting into the partition.
- Casing is in line with partition.

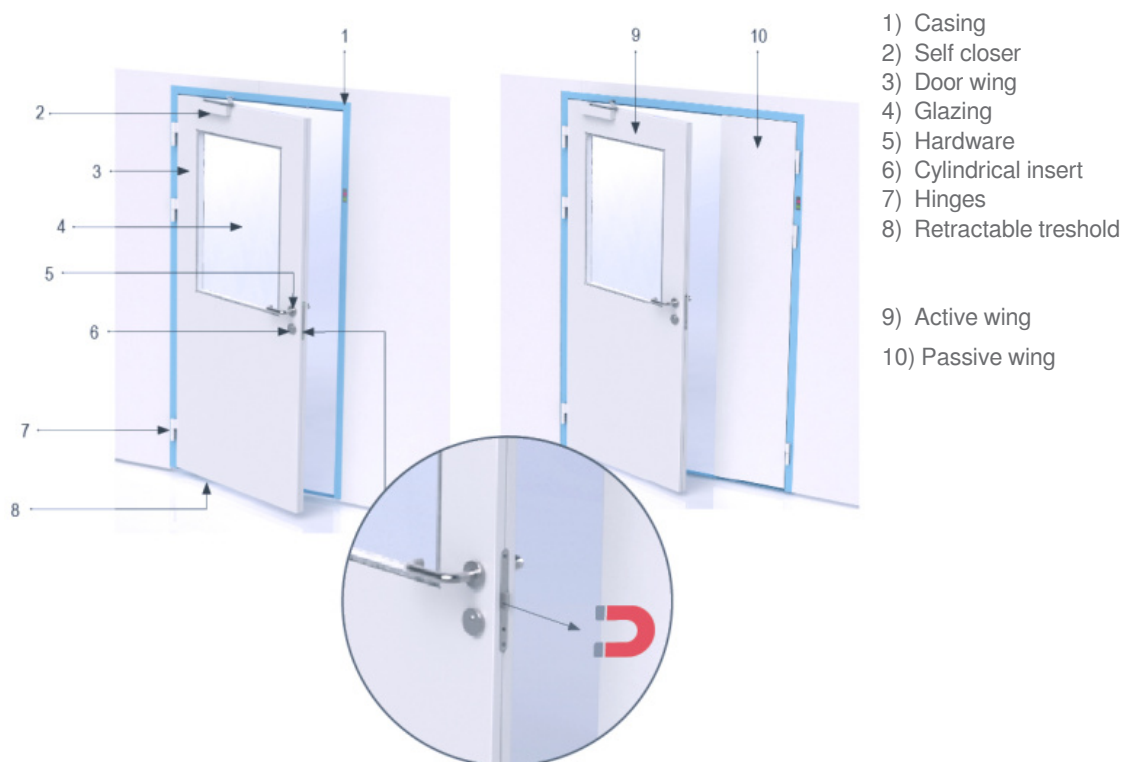

ADVANTAGES

- Magnetic locks - tongue extends until closing and no damage to casing the paint.

TECHNICAL DATA

Door type

basic hinged door I

Door dimensions

700x2040 mm

800x2040 mm

900x2040 mm

1000x2040 mm

1100x2040 mm

1200x2040 mm

1200x2040 mm (active wing width 900mm)

1300x2040 mm (active wing width 900mm)

1400x2040 mm (active wing width 900mm)

1500x2040 mm (active wing width 900mm)

1600x2040 mm (active wing width 900mm)

1700x2040 mm (active wing width 900mm)

S - passage width at 90° opening, recommended standard dimensions are given, H - clear height

In atypical design it is necessary to observe: min. height 1200 mm and max. 2400 mm.

In the case of an atypical active door wing, it is necessary to specify the dimensions of the active wing as part of the code. For example 1500/800/x2040;52 (clear width 1500, active wing 00, passive wing 700).

MORE INFORMATION, PHOTOS

