
cat. no. 103.09

Glazing of partition panels

THE SLIDING WINDOW





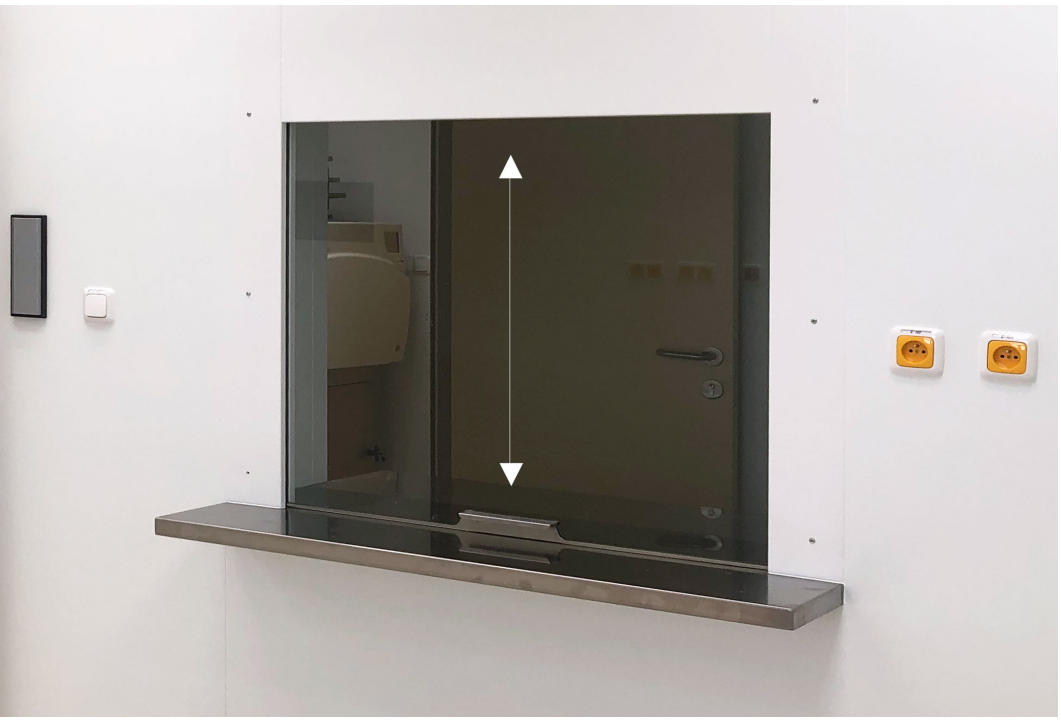

The sliding window is one of the basic components for building clean areas and workplaces with maximum safety, sterility, hygiene, easy maintenance and sanitation.

Its design is mainly suitable for areas in the pharmaceutical industry and in healthcare facilities.

TECHNICAL DATA

Type of product
The sliding window

Assembly thickness
60 mm
The thickness of the sliding window assembly is not adjusted to the wall into which it is installed. The window thickness is always 60 mm.

Pass - through opening dimensions	
width	**height**
700 mm	**750 mm**
940 mm	**750 mm**
The standard window dimensions are 940 x 750 mm. An agreement can be made on the manufacture of a window of atypical dimensions and design.	

Glazing
Safety glass 6mm thick
Without glazing (solid tile)
Atypical

Cover shade and material
Metal sheet, hue RAL 9016
Stainless steel AISI304
Komaxit, hue RAL

Window sill
double-sided
single-sided
without a sill
atypical
The sill desk for the sliding window consists of 2 pieces of the facing in stainless design with a laminated board filler 21 mm thick

Atypical design
Type design
Atypical design
Type design 0 - Unique specification out of offered versions Atypical design Q - atypical design that cannot be uniquely specified by a code

MORE INFORMATION, PHOTOS